



HR15N

SELF PROPELLED WORK PLATFORM



15.40m (51ft)
Working height

9.80m (32ft)
Working outreach

1.50m Narrow Chassis
Allows operation in
confined areas

SiOPS® as Standard
Multi award-winning
operator protection

Bi-Energy Power
Optimising utilisation

225kg SWL
Extra capacity for tools
and materials

Telescopic Upper Boom
Greater accuracy when
positioning platform

**Platform Rotation
& Fly-Boom**
Improving manoeuvrability
on site



niftylift.com






nifty

Heightrider 15N

The Nifty **Height Rider 15N Bi-Energy (HR15NDE)** offers one of the best working envelopes in its class. Designed using the latest computer technology, it delivers unrivalled working outreach combined with pinpoint accuracy when positing the platform. A super narrow base with Bi-Energy power as standard makes it ideal for a wide range of applications.

SAFETY FEATURES

- Manual Recovery with Hand Pump
- Automatic Failsafe Brakes
- SiOPS®
- CE Mark
- Tilt Alarm
- Solid Tyres
- Dual Harness Points
- Dual Controls (platform & base)
- Lock Valves on all Hydraulic Cylinders

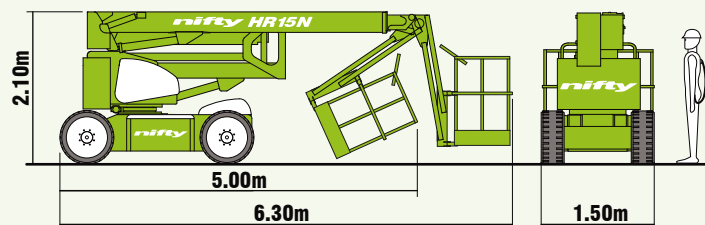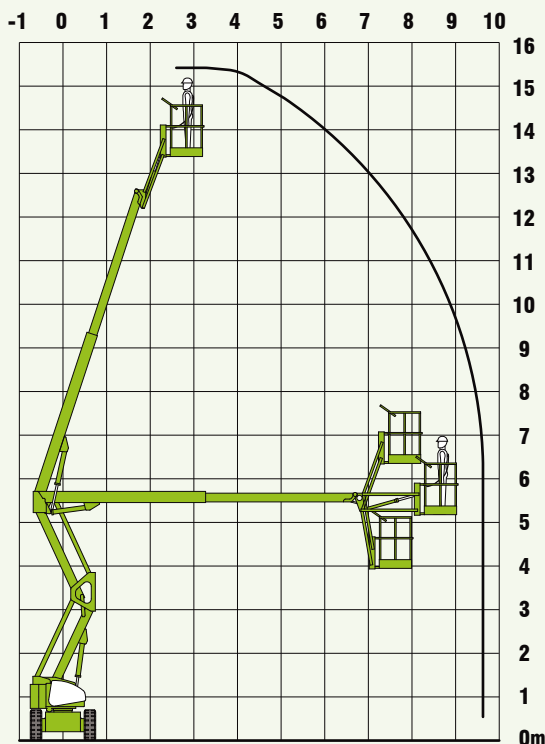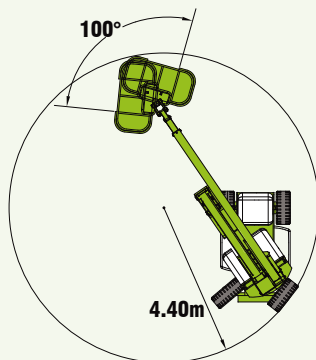

With more outreach than any other machine in its class and a base width of only 1.50m, the **HR15NDE** is one of the most effective and versatile self propelled platforms available.

SPECIFICATIONS

Working Height	15.40m	50ft 6in
Platform Height	13.40m	44ft
Working Outreach	9.80m	32ft
Slew	360°	
Fly-Boom Arc	150°	
Width	1.50m	4ft 11in
Height	2.10m	6ft 11in
Length - Stowed	5.00m	16ft 5in
- Overall	6.30m	20ft 8in
Minimum Weight	6,700kg*	14,770lbs*
Turning Radius - Outside	4.40m	14ft 5in
Platform Rotation	100°	
Platform Capacity	225kg	500lbs
Platform Size	1.50m x 0.70m	4ft 11in x 2ft 4in
Drive Speed	4 kph	2.5 mph
Gradeability	25% (14°)	
Control System	Fully proportional electric over hydraulic	
Power System	Bi-Energy Only - Battery & Diesel (722 18Hp Kubota)	

* Weights may vary according to specification, please confirm before ordering.

Due to a policy of continuing development and improvement, Niftylift reserves the right to change any specification without notice. Please confirm exact specification before ordering.

Supplied by:

Manufacturers of trailer mounted, self propelled and vehicle mounted platforms.

NIFTYLIFT LTD
Fingle Drive
Stonebridge
Milton Keynes
MK13 0ER
England
www.niftylift.com
e.mail: info@niftylift.com
Tel.: +44 (0)1908 223456
Fax.: +44 (0)1908 312733

